

Plastic


Laser Safety Windows

Window P5B04



- Standard filter for red lasers
- Max. dimension: 1219 × 915 mm

Transmission-/OD Curve P5B04**

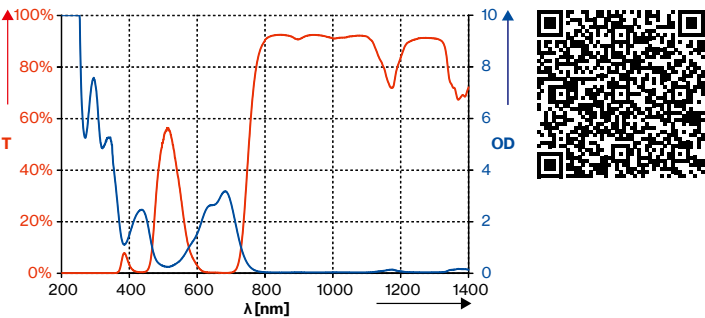

Window	P5B04
Colour	Green
Certification	OD
VLT (approx.)	25 %
Visual Brightness	Limited
Colour View	Slightly Limited
Filter Thickness	approx. 3mm

Wavelength	[nm]	OD
	580–600	1-2
	>600–620	1+
	>620–633	2-3
	>633–<670	2+
	670–690	2-3
	>690–710	2+
	>710–725	1+


Dimension	[mm]	Art. Number
	200×100	000.P5B04.1001
	297×210	000.P5B04.1002
	450×300	000.P5B04.1006
	600×450	000.P5B04.1007

Window P5E04



- Standard filter for UV, blue and green lasers
- Max. dimension: 1219×915mm

Transmission-/OD Curve P5E04**

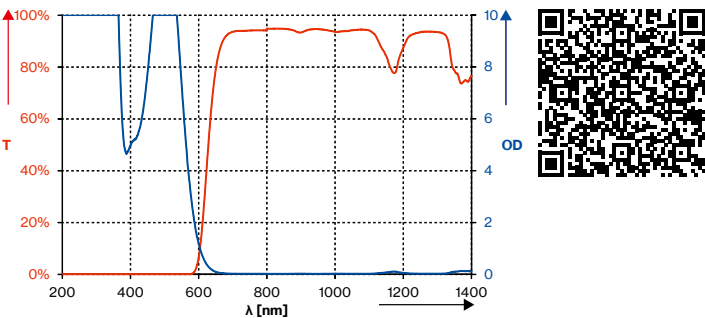

Window	P5E04
Colour	Dark Red
Certification	OD
VLT (approx.)	6 %
Visual Brightness	Limited
Colour View	Limited
Filter Thickness	approx. 3mm

Wavelength	[nm]	OD
	180–360	10+
	>360–365	8+
	>365–370	6+
	>370–380	5+
	>380–<401	4+
	401–<440	5+
	440–<450	6+
	450–<455	7+
	455–<460	8+
	460–<470	9+
	470–532	10+
	>532–540	9+
	>540–545	8+
	>545–550	7+
	>550–558	6+
	>558–566	5+
	>566–574	4+
	>574–580	3+
	>580–589	2+
	>589–600	1+
	5400–<10600	5+
	10600–11000	6+
	>11000–11500	5+

Dimension	[mm]	Art. Number
	200×100	000.P5E04.1001
	297×210	000.P5E04.1002
	450×300	000.P5E04.1006
	600×450	000.P5E04.1007